


Key

- Existing footpath (Asphalt or Concrete) not built for vehicle loading
- Newly constructed driveway (matching existing footpath Asphalt or Concrete) and built to vehicle loading requirements
- Newly constructed driveway built to vehicle loading requirements matching surface material at garage

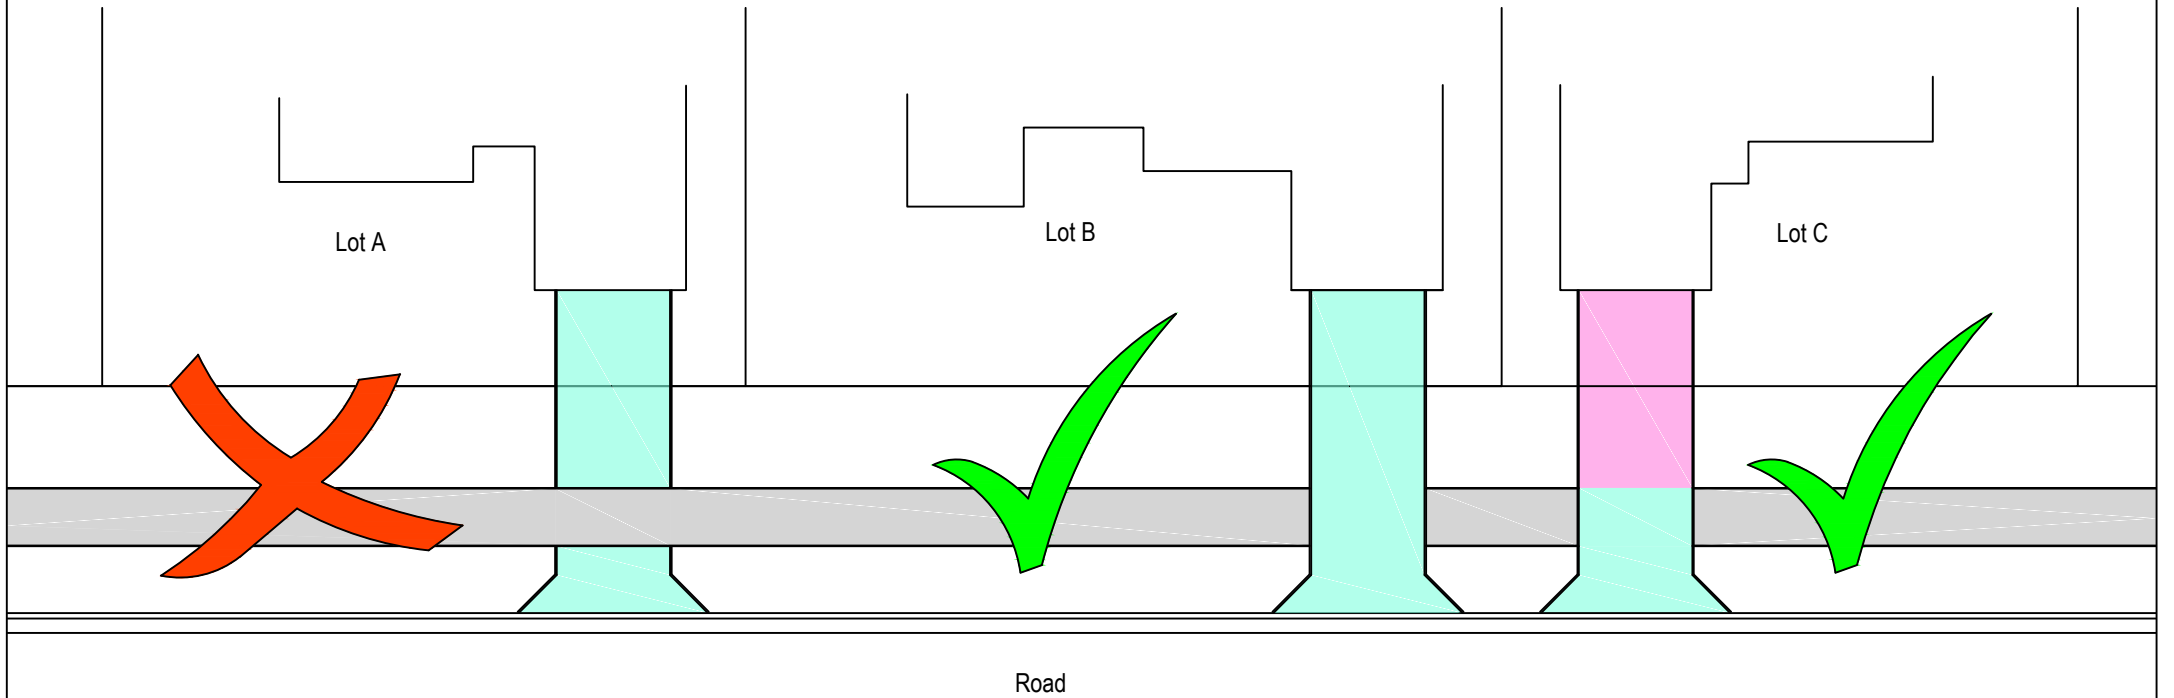

Lot A Drive is **incorrect** and does not meet council standards. The footpath battens and surface (Asphalt or Concrete) have not been cut out. The surface has not been replaced to match footpath either side

Lot B Drive is **correct** and meets council standards. The footpath surface (Asphalt or Concrete) and batten has been removed and the entire drive way from road to boundary has been constructed with the same surface material (Asphalt or Concrete) of the footpath either side.

Lot C Drive is **correct** and meets council standards. The footpath surface (Asphalt or Concrete) and batten has been removed and reconstructed from the road to back of footpath using the same surface material (Asphalt or Concrete) as the footpath either side. From the back of footpath to the boundary the drive way has been constructed to match the driveway material outside their garage